



NINGBO ZHILIAN ELECTRON TECHNOLOGY CO.,LTD

Address: Industrial Zone, Fuhai Town, Cixi, Ningbo, China
Email: John@nb-zhilian.com
Contact: John Bao
Mob :+86 188 5823 1186

2019

PRODUCT MANUALS

Air Cooler
Fan
Air Purifier
Heater





COMPANY PROFILE

NINGBO ZHILIAN ELECTRON TECHNOLOGY CO.,LTD. Is a professional manufacture which is established in 1997, and exporter that is concerned with design, development and production of Air cooler, Fan, Air Purifier and heater. We are located in NINGBO, CIXI, FUHAI INDUSTRY, which is the Home appliance base for the fan and heater. With convenient transportation access. All of our products comply with international quality standards, such as CE, GS, ROHS, CB and ISO9001 and are greatly appreciated in a variety of different markets throughout the world.

Covering an area of 20000 square meters, now there are more than 500 employees, an annual sales figure that exceeds USD50,000,000.00 and are currently exporting 60% of our production worldwide.

Our Tenet: Quality First, Customers First, Serve Customers sincerely, Create We look forward to establishing a long-term mutual beneficial business relationships with you.

Air Cooler

STRONG REFRIGERATION

Smooth speed, full power




PERSISTENT COOL

Strong refrigeration parallel
Through type super large air volume
Persistent cool



LARGE ANGLE

Large angle automatic swing leaves send wind
Feel the coolness quickly

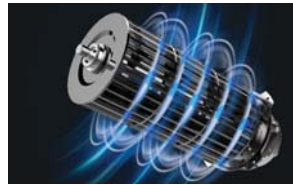

FILTER PURIFICATION

Clean the air
Add water, not dry
Fresh air is like being in a forest.



SILENT DESIGN

New mute technology
Caring for baby sleep



GUIDE HOOD

The guide hood sends wind more evenly.
The body feels soft comfortable



MULTIPLE MODES

Multiple wind mode selection to meet
multiple usage needs



AIR COOLER



RFS-20

- **Mechanical Version**
- 3 speed control
- Automatic weep the wind blowing a wider range
- High efficient ice curtain for cooling
- Tank capacity:3.0L
- Special wheels for easy mobility



RFS-08

- **Mechanical Version**
- 3 speed control
- Automatic weep the wind blowing a wider range
- High efficient ice curtain for cooling
- Tank capacity:4.0L
- Special wheels for easy mobility



RFS-09

- **Mechanical Version**
- 3 speed control
- Automatic weep the wind blowing a wider range
- High efficient ice curtain for cooling
- Tank capacity:8.0L
- Special wheels for easy mobility



RFS-18

- **Mechanical Version**
- 3 speed control
- Automatic weep the wind blowing a wider range
- 7.5 hours timer
- High efficient ice curtain for cooling
- Tank capacity:6.0L
- Special wheels for easy mobility



RFS-19

- **Mechanical Version**
- 3 speed control
- Automatic weep the wind blowing a wider range
- High efficient ice curtain for cooling
- Tank capacity:12.0L
- Special wheels for easy mobility



RFS-21

- **Mechanical Version**
- 3 speed control
- Automatic weep the wind blowing a wider range
- High efficient ice curtain for cooling
- Tank capacity:12.0L
- Special wheels for easy mobility



RFS-20R

- **Electrical Version**
- 3 speed control
- Automatic weep the wind blowing a wider range
- High efficient ice curtain for cooling
- Tank capacity:3.0L
- Special wheels for easy mobility



RFS-08R

- **Electrical Version**
- Push-option switch and remote control
- 3 speed control
- Automatic weep the wind blowing a wider range
- 0-7.5 hours timer
- High efficient ice curtain for cooling
- Tank capacity:4.0L
- Special wheels for easy mobility



RFS-09R

- **Electrical Version**
- Push-option switch and remote control
- 3 speed control
- Automatic weep the wind blowing a wider range
- 0-7.5 hours timer
- High efficient ice curtain for cooling
- Tank capacity:8.0L
- Special wheels for easy mobility



RFS-18R

- **Electrical Version**
- 3 speed control
- 0-7 hours timer
- Automatic weep the wind blowing a wider range
- High efficient ice curtain for cooling
- Semi-pump type water tank
- Tank capacity:6.0L



RFS-19R

- **Electrical Version**
- 3 speed control
- 0-7.5 hours timer
- Automatic weep the wind blowing a wider range
- High efficient ice curtain for cooling
- Semi-pump type water tank
- Tank capacity:12.0L



RFS-21R

- **Electrical Version**
- 3 speed control
- 0-7.5 hours timer
- Automatic weep the wind blowing a wider range
- High efficient ice curtain for cooling
- Semi-pump type water tank
- Tank capacity:12.0L

Product Model	Power	Product DIMS (WxDxH)	Consumer Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
PFS-20	65W	250x280x580mm	325x300x615mm	1	450	951	1117	4.0	5.7
PFS-20R	65W	250x280x580mm	325x300x615mm	1	450	951	1117	4.0	5.7
PFS-08	65W	300x280x750mm	355x335x750mm	1	303	639	751	5.7	7.4
PFS-08R	65W	300x280x750mm	355x335x750mm	1	303	639	751	5.7	7.4
RFS-09	65W	370x300x740mm	435x375x755mm	1	219	463	544	8.0	9.5
RFS-09R	65W	370x300x740mm	435x375x755mm	1	219	463	544	8.0	9.5

Product Model	Power	Product DIMS (WxDxH)	Consumer Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
RFS-18	65W	235x260x565mm	335x340x775mm	1	306	646	759	1.5	2.3
RFS-18R	65W	235x260x565mm	335x340x775mm	1	306	646	759	1.5	2.3
RFS-19	65W	280x290x730mm	335x340x775mm	1	306	646	759	1.4	2.2
RFS-19R	65W	280x290x730mm	335x340x775mm	1	306	646	759	1.4	2.2
RFS-21	65W	235x260x565mm	335x340x775mm	1	306	646	759	1.5	2.3
RFS-21R	65W	235x260x565mm	335x340x775mm	1	306	646	759	1.5	2.3

INDUSTRIAL AIR COOLER



ZL-40A-M

- Mechanical Version
- Voltage: 220-240V ~ 50Hz
- 3 speed control
- Automatic weep the wind blowing a wider range
- Air output: 3500 m³/h
- Tank capacity :20L
- Special wheels for easy mobility



ZL-40A-E

- Electronic Version
- Voltage: 220-240V ~ 50Hz
- 3 speed control
- Push-button switch and remote control
- Automatic weep the wind blowing a wider range
- Air output: 3500 m³/h
- Tank capacity :20L
- Special wheels for easy mobility



ZL-60A-M

- Mechanical Version
- Voltage: 220-240V ~ 50Hz
- 3 speed control
- Automatic weep the wind blowing a wider range
- Air output: 6000 m³/h
- Tank capacity :45L
- Special wheels for easy mobility



ZL-60A-E

- Electronic Version
- Voltage: 220-240V ~ 50Hz
- 3 speed control
- Push-button switch and remote control
- Automatic weep the wind blowing a wider range
- 0-7 hours timer
- Air output: 6000 m³/h
- Tank capacity:45L
- Special wheels for easy mobility



ZL-40B-M

- Mechanical Version
- Voltage: 220-240V ~ 50Hz
- 3 speed control
- Automatic weep the wind blowing a wider range
- Air output: 4000 m³/h
- Tank capacity :25L
- Special wheels for easy mobility



ZL-40B-E

- Electronic Version
- Voltage: 220-240V ~ 50Hz
- 3 speed control
- Push-button switch and remote control
- Automatic weep the wind blowing a wider range
- 0-7 hours timer
- Air output: 4000 m³/h
- Tank capacity :25L
- Special wheels for easy mobility



ZL-80A-M

- Mechanical Version
- Voltage: 220-240V ~ 50Hz
- 3 speed control
- Automatic weep the wind blowing a wider range
- Air output: 8000 m³/h
- Tank capacity :45L
- Special wheels for easy mobility



ZL-80A-E

- Electronic Version
- Voltage: 220-240V ~ 50Hz
- 3 speed control
- Push-button switch and remote control
- Automatic weep the wind blowing a wider range
- 0-7 hours timer
- Air output: 8000 m³/h
- Tank capacity:45L
- Special wheels for easy mobility

Product Model	Power	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
ZL-40A-M	70W	410x380x880mm	460x405x860mm	1	150	335	400	7.8	8.8
ZL-40A-E	70W	410x380x880mm	460x405x860mm	1	150	335	400	7.8	8.8
ZL-40B-M	100W	410x380x1010mm	460x405x970mm	1	135	300	355	7.8	8.8
ZL-40B-E	100W	410x380x1010mm	460x405x970mm	1	135	300	355	7.8	8.8

Product Model	Power	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
ZL-60B-M	200W	610x430x1000mm	640x450x950mm	1	85	180	225	15.5	18.5
ZL-60B-E	200W	610x430x1000mm	640x450x950mm	1	85	180	225	15.5	18.5
ZL-80A-M	300W	610x430x1140mm	640x450x1100mm	1	75	165	195	16.5	19.5
ZL-80A-E	300W	610x430x1140mm	640x450x1100mm	1	75	165	195	16.5	19.5



Fan

BLADELESS FAN

Secure design

FAN



AIR PURIFICATION
Clean air
Breathe healthy all the time




TURBO
Strong wind
Enjoy the cool and refreshing



GUIDE HOOD
The guide hood sends wind more evenly
The body feels soft
Comfortable



LOW NOISE OPERATION
Smooth and powerful
No noise
Cool and comfortable

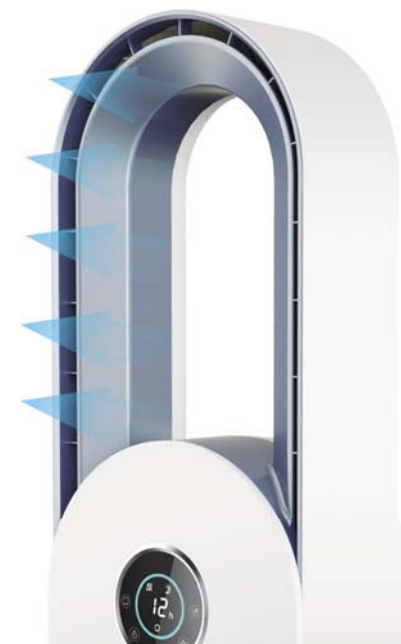

FDC50A

- 3 speed setting
- Natural, Normal, Sleep for choosing
- 0-15 hours timer
- No blade, More safety
- Low noise
- Big air flow



FDC50B

- 3 speed setting
- Natural, Normal, Sleep for choosing
- 0-15 hours timer
- No blade, More safety
- Low noise
- Big air flow

Stand Fan

STRONG WIND POWER

Wide angle wind



HIGH EFFICIENCY MOTOR

High Precision Strong Motor
Big wind
Wind is more stable



SILENT CYCLONE LEAF

Five wing-shaped whirlwind leaves
Drive away the summer
Embrace the breeze



ENERGY CONSERVATION

Soft and durable



SILENT DESIGN

New mute technology
Caring for baby sleep



GUIDE HOOD

The guide hood sends wind more evenly.
The body feels soft,
Comfortable



FOUR MODES

Multiple wind mode selection to meet
multiple usage needs



STAND FAN




FAN101E

- Electrical Stand Fan
- Push-option switch
- Remote control
- 5 blades
- 3 speed fan
- Wind type for selection (normal/natural/sleep)
- 7.5 hours timer
- Oscillation:80°



FAN102

- Mechanical Stand Fan
- Wind type for selection (normal/natural/sleep)
- 5 blades
- 1 hour timer
- Oscillation:80°

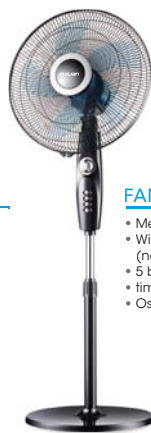


FAN106

- Mechanical Stand Fan
- Wind type for selection (normal/natural/sleep)
- 5 blades
- timer:1 hour
- Oscillation:80°



FAN019E

- Mechanical Stand Fan
- Low noise,operate smoothly
- Wind type for selection (normal/natural/sleep)
- 9 blades
- 7.5 hours timer
- Oscillation:80°

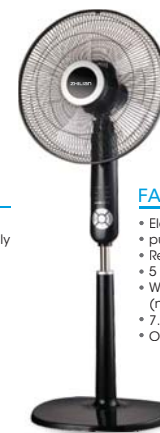


FAN116E

- Electrical Stand Fan
- push-option switch
- Remote control
- 5 blades
- Wind type for selection (normal/natural/sleep)
- 7.5 hours timer
- Oscillation:80°



FAN117

- Mechanical Stand Fan
- Wind type for selection (normal/natural/sleep)
- 5 blades
- Timer:1 hour
- Oscillation:80°

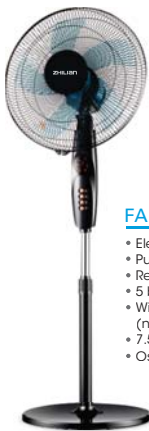

FAN105E

- Electrical Stand Fan
- Push-option switch
- Remote control
- 5 blades
- Wind type for selection (normal/natural/sleep)
- 7.5 hours timer
- Oscillation:80°




FAN113

- Mechanical Stand Fan
- Wind type for selection (normal/natural/sleep)
- 5 blades
- Timer:1 hour
- Oscillation:80°




FAN016E

- Mechanical Stand Fan
- Low noise,operate smoothly
- Wind type for selection (normal/natural/sleep)
- 5 blades
- 5 hours timer
- Oscillation:80°

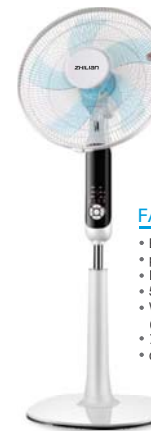


FAN117E

- Electrical Stand Fan
- push-option switch
- Remote control
- 5 blades
- Wind type for selection (normal/natural/sleep)
- 7.5 hours timer
- Oscillation:80°

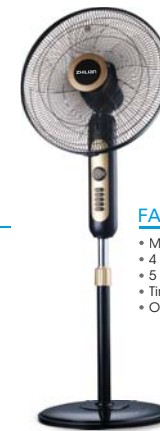

FAN4510

- Mechanical Stand Fan
- 4 speed control
- With remote control
- 5 blades
- Timer:1 hour
- Oscillation:80°

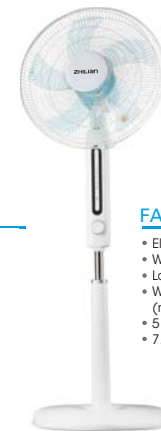

FAN1601E

- Electrical Stand Fan
- 4 speed control
- Low noise,operate smoothly
- Wind type for selection (normal/natural/sleep)
- 5 blades
- 7.5 hours timer

Product Model	Power	Product DIMS (WxDxH)	Consumer BoxDIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
FAN101E	60W	445x420x1350mm	480x225x460mm	1	520	1125	1310	5.0	5.9
FAN102	60W	445x420x1350mm	480x225x460mm	1	520	1125	1310	5.0	5.9
FAN106	60W	445x420x1330mm	480x225x460mm	1	520	1125	1310	5.0	5.9
FAN105E	60W	445x420x1330mm	480x225x460mm	1	520	1125	1310	5.0	5.9
FAN113	60W	445x420x1400mm	480x225x460mm	1	520	1125	1310	5.0	5.9
FAN016E	60W	445x420x1400mm	585x180x460mm	1	535	1155	1340	5.1	5.5

Product Model	Power	Product DIMS (WxDxH)	Consumer BoxDIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
FAN019E	60W	445x420x1400mm	505x225x485mm	1	470	1015	1180	5.6	6.4
FAN116E	60W	445x420x1400mm	505x225x485mm	1	470	1015	1180	5.6	6.4
FAN117	60W	445x420x1400mm	535x180x460mm	1	585	1265	1490	5.6	6.4
FAN117E	60W	445x420x1400mm	535x180x460mm	1	585	1265	1490	5.6	6.4
FAN4510	60W	445x420x1375mm	540x240x520mm	1	385	830	965	6.5	7.3
FAN1601E	60W	445x420x1375mm	580x175x450mm	1	264	557	654	6.2	7.0



DC Fan

FREQUENCY CONVERSION TECHNOLOGY

Simulate the real natural wind

DC FAN



7 PAGES

7 Feather fan design, dense cutting air flow, more uniform air delivery.



LOW NOISE OPERATION

Smooth and powerful, no noise, cool and comfortable



DYNAMIC BALANCE

Both sides of the track axis balance calibration



STRONG WIND

High-performance motor, uniform reduction of motor vibration and noise



GUIDE HOOD

The guide hood sends wind more evenly, the body feels soft, comfortable




SMOOTH OPERATION

The low speed keeps steady



FDC30

- Electrical Stand Fan
- Low noise, operate smoothly
- 24 speed control
- 7 blades
- 12 hours timer
- Intelligent frequency conversion
- Saves electricity

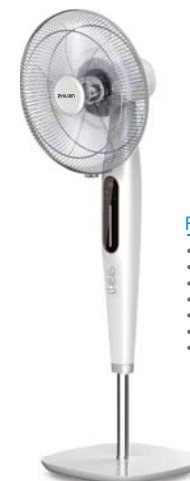

FDC40

- Electrical Stand Fan
- Low noise, operate smoothly
- 24 speed control
- 9 blades
- 12 hours timer
- Intelligent frequency conversion
- Saves electricity

Product Model	Power	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
FDC30	16W	350x350x1100mm	520x210x355mm	1	6336	1470	15840	2.63	3.63
FDC40	16W	405x445x1300mm	1100x200x490mm	1	696	529	1728	5.8	6.8

STAND MIST FAN



FS400C

- 16" (40cm) Stand Mist Fan
- With Remote Control
- Sensor Touch Control Panel
- Large colorful screen display
- 3 Fan modes: Normal, Natural, Sleep
- 78° oscillation control
- 3 fan speed, 3 mist volume
- Room temperature display
- 7.5 hours timer
- Power consumption :100w
- Water tank: 2.0L for 7.5 hours mist
- Water consumption: 0.28L/h
- With movable castor



FS400V

- 16" (40cm) Stand Mist Fan
- With Remote Control
- Sensor Touch Control Panel
- Large colorful screen display
- 3 Fan modes: Normal, Natural, Sleep
- 78° oscillation control
- 3 fan speed, 3 mist volume
- Room temperature display
- 7.5 hours timer
- Power consumption :100w
- Water tank: 2.0L for 7.5 hours mist
- Water consumption: 0.28L/h
- With movable castor



FS400W

- 16" (40cm) Stand Mist Fan
- With Remote Control
- Sensor Touch Control Panel
- Large colorful screen display
- 3 Fan modes: Normal, Natural, Sleep
- 78° oscillation control
- 3 fan speed, 3 mist volume
- Room temperature display
- 7.5 hours timer
- Power consumption :100w
- Water tank: 2.0L for 7.5 hours mist
- Water consumption: 0.28L/h
- With movable castor

STAND MIST FAN

Spray cooling, pure humidification



REFRESHING, MOISTURIZING

Long-term cool
Full release of moisture



SPRAY COOLING

Ultrasonic atomized water
molecules



ANION PURIFICATION

Innovation of high concentration
negative ion function



7.5 H TIMING

Remote control function
7.5 hours at will

Product Model	Power	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)
FS400C	1500W	185x150x248mm	675x410x290mm
FS400V	500W	125x120x170mm	565x425x210mm
FS400W	500W	125x100x170mm	585x440x205mm

TOWER FAN



HTF01

- Mechanical version
- Three speed setting
- Timer: 1 hour
- Right and left swing automatically
- Widespread oscillation



HTF01E

- Digital version
- Remote control with LED display
- Three speed setting
- Mode selection (sleep/natural/normal wind)
- 12 hours timer



HTF02

- Mechanical version
- Three speed setting
- Mode selection (sleep/natural/normal wind)
- Widespread oscillation



HTF02E

- Digital version
- Remote control with LED display
- Three speed setting
- Mode selection (sleep/natural/normal wind)
- 15 hours timer



HTF02EH 1.0m

- Digital version
- Remote control with LED display
- Six speed setting
- Mode selection (sleep/natural/normal wind)
- 12 hours timer



HTF02EH 1.2m

- Digital version
- Remote control with LED display
- Six speed setting
- Mode selection (sleep/natural/normal wind)
- 12 hours timer



HTF04

- Mechanical version
- Three speed setting
- Right and left swing automatically
- Widespread oscillation



HTF04E

- Digital version
- Remote control with LED display
- Six speed setting
- Mode selection (sleep/natural/normal wind)
- 0-9 hours timer

Product Model	Power	Product DIMS (WxDxH)	Consumer Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
HTD01	55W	868x280x280mm	905x195x215mm	1	712	1502	1766	2.9	3.8
HTD01E	55W	868x280x280mm	905x195x215mm	1	712	1502	1766	2.9	3.8
HTD02	55W	900x350x350mm	945x205x215mm	1	648	1369	1609	3.7	4.4
HTD02E	55W	900x350x350mm	945x205x215mm	1	2384	5033	5916	3.7	4.4
HTF02EH(1.0m)	55W	1000x350x350mm	1235x215x245mm	1	305	643	756	5.0	6.8
HTF02EH(1.2m)	55W	1200x350x350mm	1035x215x245mm	1	495	1046	1229	4.1	5.8
HTF04	55W	870x280x280mm	905x195x215mm	1	712	1502	1766	3.5	4.5
HTF04E	55W	870x280x280mm	905x195x215mm	1	712	1502	1766	3.5	4.5

AIR PURIFIER


HOUSEHOLD SMART AIR STATION

Super purification and filtration systems,
Comprehensive filtering harmful substances



FOUR PURIFICATION

Scientific design, circulate and purification

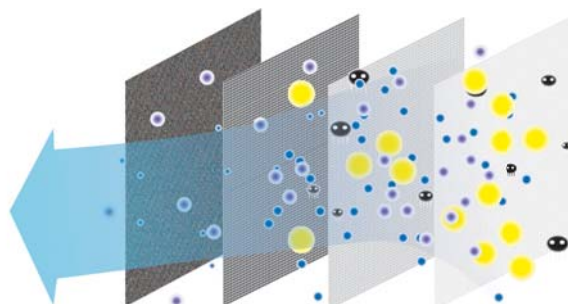

ACTIVE CARBON
COMBINED FILTER COLD CATALYST HEPA FILTER PRE-FILTER



360 ° CIRCULATING

Three-dimensional cycle purification
360 ° in the wind, purify the effect is good



SILENT DESIGN

New mute technology
Caring for baby sleep



INTELLIGENT DISPLAY

Comprehensive Smart Technology
Easy to operate



HUMANIZED DESIGN

Intelligent control, easy to operate



AIR PURIFIER



BK-01

- Dust sensor/Air sensor
- Ionizer technology
- Button pressing
- Smart sensors for night mode
- 4 Fan speeds
- Silent mode
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe cover



BK-02

- Dust sensor/Air sensor
- Ionizer technology
- Button pressing
- 3 fan speeds
- Silent mode
- 0-8 hours Timing
- Visible air quality indicator by color
- Filter replacement indicator



BK-02A

- Dust sensor/Air sensor
- Ionizer technology
- Touch screen operation panel
- 4 fan speeds
- Silent mode
- 0-8 hours Timing
- Visible air quality indicator by color
- Filter replacement indicator



BK-07

- Dust sensor/Air sensor
- Ionizer technology
- LCD display/Remote control
- Touch screen operation panel
- 3 fan speeds
- Silent mode
- 0-24 hours Timing
- Digital display of air quality
- Filter replacement indicator



BK-08

- Dust sensor/Air sensor
- Ionizer technology
- Button pressing
- 3 fan speeds
- Silent mode
- 0-8 hours timing
- Visible air quality indicator by color
- Filter replacement indicator



BKJ-33

- Dust sensor/Air sensor
- Ionizer technology
- Touch screen operation panel
- Sleep mode
- 4 fan speeds
- 0-8 hours timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock



BK-03

- Dust sensor/Air sensor
- Ionizer technology
- Button pressing
- 3 fan speeds
- Visible air quality indicator by color
- Filter replacement indicator



BK-05

- Dust sensor/Air sensor
- Ionizer technology
- LCD display/Remote control
- Touch screen operation panel
- 3 fan speeds
- Silent mode
- 0-24 hours Timing
- Digital display of air quality
- Filter replacement indicator



BK-06

- Dust sensor/Air sensor
- Ionizer technology
- LCD display/Remote control
- Touch screen operation panel
- 3 fan speeds
- Silent mode
- 0-24 hours timing
- Digital display of air quality
- Filter replacement indicator



BKJ-70A

- Dust sensor/Air sensor
- Ionizer technology
- Touch screen operation panel
- Sleep mode
- 4 fan speeds/0-8 hours timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock
- PM2.5 air quality display



BKJ-80A

- Dust sensor/Air sensor
- Ionizer technology
- Touch screen operation panel
- Sleep mode
- 4 fan speeds/0-8 hours timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock
- PM2.5 air quality display



BKJ-215

- Dust sensor/Air sensor
- Touch screen operation panel
- 4 fan speeds
- 0-8 hours timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock

Product Model	Power	Max Noise	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	Effective area	N.W.(kgs)	G.W.(kgs)
BK-01	48W	≤59dB	340x195x650mm	398x255x690mm	45m²	6.6	7.5
BK-02	45W	≤58dB	322x180x535mm	380x230x590mm	35m²	5.5	6.5
BK-02A	45W	≤58dB	322x180x535mm	380x230x590mm	35m²	5.5	6.5
BK-03	15W	≤52dB	260x150x450mm	287x170x475mm	28m²	2.2	3.0
BK-05	45W	≤58dB	322x180x535mm	375x240x615mm	38m²	6.2	7.3
BK-06	45W	≤58dB	322x180x535mm	375x240x615mm	38m²	6.2	7.3

Product Model	Power	Max Noise	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	Effective area	N.W.(kgs)	G.W.(kgs)
BK-07	45W	≤58dB	322x180x535mm	375x240x615mm	38m²	6.2	7.3
BK-08	45W	≤58dB	322x180x535mm	375x240x615mm	36m²	6.2	7.3
BKJ-33	65W	≤66dB	365x205x545mm	420x255x600mm	42m²	6.7	7.7
BKJ-70A	120W	≤70dB	399x380x720mm	470x450x795mm	114m²	14.5	18.2
BKJ-80A	100W	≤70dB	410x393x705mm	480x465x780mm	102m²	14.0	18.0
BKJ-215	45W	≤59dB	328x182x495mm	380x233x565mm	28m²	4.7	5.3

AIR PURIFIER



BKJ-215C

- Dust sensor/air sensor
- Ionizer technology
- Touch screen operation panel
- Sleep mode
- 4 fan speeds
- 0-8 hours Timing
- Visible air quality indicator by color
- Filter replacement indicator



BKJ-300

- Dust sensor/air sensor
- Ionizer technology
- Touch screen operation panel
- Smart sensors for night mode
- 4 fan speeds
- 0-15 hours Timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock



BKJ-300A

- Dust sensor/air sensor
- Ionizer technology
- Touch screen operation panel
- Sleep mode
- 4 fan speeds
- 0-8 hours timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock
- PM2.5 air quality display



BKJ-306

- Dust sensor/air sensor
- Ionizer technology
- Touch screen operation panel
- Sleep mode
- 4 fan speeds
- 0-8 hours Timing
- Visible air quality indicator by color
- Filter replacement indicator



BKJ-306A

- Dust sensor/air sensor
- Ionizer technology
- Touch screen operation panel
- 4 fan speeds
- 0-15 hours timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock



BKJ-250F-A01

- Dust sensor/air sensor
- Ionizer technology
- Touch screen operation panel
- Stalinite panel
- Night mode/USB charger
- 4 fan speeds
- 0-8 hours timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock

Product Model	Power	Max Noise	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	Effective area	N.W.(kgs)	G.W.(kgs)
BKJ-215C	45W	≤59dB	328x182x495mm	380x225x580mm	28m ²	4.7	5.7
BKJ-300	60W	≤61dB	380x240x550mm	400x260x585mm	36m ²	6.1	7.3
BKJ-300A	68W	≤65dB	380x215x565mm	430x252x615mm	38m ²	6.3	7.3
BKJ-306	60W	≤61dB	380x230x560mm	400x250x595mm	37m ²	6.2	7.5
BKJ-306A	65W	≤66dB	380x230x620mm	425x270x675mm	37m ²	6.0	7.0
BKJ-250F-A01	52W	≤60dB	267x285x668mm	310x330x730mm	40m ²	7.0	7.5



OLED DISPLAY

Accurate display of real-time air quality and working status



RAPID CYCLING

Big space, fast loop
Strong purification cycle ability



BKJ-310F-A01

- Dust sensor/air sensor
- Ionizer technology
- Touch screen operation panel
- 4 fan speeds
- 0-8 hours Timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock



BKJ-350

- Dust sensor/air sensor
- Ionizer technology
- Touch screen operation panel
- Remote control
- Smart sensors for night mode
- 3 fan speeds
- Silent mode
- 0-8 hours Timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock



BKJ-350A

- Dust sensor/air sensor
- Ionizer technology
- Touch screen operation panel
- Remote control
- Smart sensors for night mode
- 3 fan speeds
- Silent mode
- 0-8 hours timing
- Visible air quality indicator by color
- Filter replacement indicator
- Children safe lock

Product Model	Power	Max Noise	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	Effective area	N.W.(kgs)	G.W.(kgs)
BKJ-310F-A01	58W	≤61dB	395x233x593mm	440x270x650mm	36m ²	6.8	7.3
BKJ-350	55W	≤60dB	405x250x592mm	450x300x650mm	54m ²	6.8	8.5
BKJ-350A	55W	≤60dB	409x250x605mm	450x300x650mm	57m ²	7.6	9.3

PTC FAN HEATER

STRONG WIND POWER

Wide angle wind



PTC CERAMIC FEVER

High heat efficiency



HIGH-POWER

Power is warmer



MORE LEVELS

Meet different needs



SAFETY PROTECTION

Toppling protection



HIGH QUALITY POWER CORD

Flame retardant material, safer and more durable



LEFT AND RIGHT SHAKE HEAD

Large area heating



PTC FAN HEATER



PTC813-05

- Ceramic heater
- Settings
- Overheat protection



PTC814-05

- Ceramic heater
- Settings
- Overheat protection
- Without plug



PTC806-15A

- 1500W Ceramic heater
- Heat settings: fan/750/1500W
- Adjustable thermostat
- Overheat protection
- Oscillation optional



PTC805-15 PTC805-18

- Ceramic heater
- Heat settings: fan/750/1500W
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection



PTC805-15A PTC805-18A

- 1500W /1800W Ceramic heater
- Heat settings: fan/750/1500W
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection
- Oscillation optional



PTC815-18A

- 1800W Ceramic heater
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection

Product Model	Power	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
PTC813-05	500W	125x100x170mm	585x440x205mm	12	6336	13380	15840	0.7	0.8
PTC814-05	500W	125x120x170mm	565x425x210mm	12	6425	13564	15944	0.5	0.65
PTC806-15A	1500W	185x145x265mm	530x430x325mm	6	2187	4617	6679	1.4	1.7
PTC805-15/PTC805-18	1500W/1800W	165x140x240mm	625x375x280mm	8	3291	6949	8168	1.5	1.8
PTC805-15A/PTC805-18A	1500W/1800W	165x140x245mm	625x375x285mm	8	3234	6827	8024	1.5	1.8
PTC815-18A	1800W	180x135x280mm	605x400x320mm	8	2789	5888	6921	1.5	1.8

PTC FAN HEATER



PTC815-18B

- 1800W Ceramic heater
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection
- Oscillation optional



**PTC809-15
PTC809-18**

- 1500W/1800W Ceramic heater
- Heat settings: fan/750/1500W
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection



**PTC809-15A
PTC809-18A**

- 1500W/1800W Ceramic heater
- Heat settings: fan/750/1500W
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection
- Oscillation optional



**PTC809-15E
PTC809-18E**

- 1500W/1800W Ceramic heater
- Heat settings: fan/750/1500W
- Heat settings: fan/900/1800W
- Touch screen operation panel
- With remote controller
- Adjustable thermostat
- Overheat protection
- Oscillation optional



**PTC802-15A
PTC802-18A**

- 1500W /1800W Ceramic heater
- Heat settings: fan/750/1500W
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection
- Oscillation optional



**PTC803-15
PTC803-18**

- 1500W /1800W Ceramic heater
- Heat settings: fan/750/1500W
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection



**PTC804-15
PTC804-18**

- 1500W /1800W Ceramic heater
- Heat settings: fan/750/1500W
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection



**PTC804-15A
PTC804-18A**

- 1500W /1800W Ceramic heater
- Heat settings: fan/750/1500W
- Heat settings: fan/900/1800W
- Adjustable thermostat
- Overheat protection
- Oscillation optional

Product Model	Power	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
PTC815-18B	1800W	180x135x310mm	605x400x350mm	8	2550	5384	6328	1.5	1.8
PTC809-15/PTC809-18	1500W/1800W	163x135x250mm	460x370x285mm	6	3340	7051	8287	1.5	1.8
PTC809-15A/PTC809-18A	1500W/1800W	163x135x250mm	460x370x285mm	6	3340	7051	8287	1.5	1.8
PTC809-15E/PTC809-18E	1500W/1800W	163x135x250mm	460x370x285mm	6	3340	7051	8287	1.5	1.8
PTC802-15A/PTC802-18A	1500W/1800W	160x130x230mm	435x360x265mm	6	3904	8241	9687	1.4	1.61
PTC803-15/PTC803-18	1500W/1800W	175x125x225mm	430x390x265mm	6	3645	7696	9046	1.35	1.5
PTC804-15/PTC804-18	1500W/1800W	175x140x245mm	465x385x290mm	6	3120	5888	7743	1.5	1.75
PTC804-15A/PTC804-18A	1500W/1800W	175x140x245mm	465x385x290mm	6	3120	5887	7743	1.5	1.75

TOWER PTC FAN HEATER



PTC810-20A

- 2000W Ceramic heater
- Heat settings: fan/1000/2000W
- Adjustable thermostat
- Overheat protection
- Oscillation optional



PTC811-20A

- 2000W Ceramic heater
- Heat settings: fan/1000/2000W
- With remote controller
- Adjustable thermostat
- Overheat protection
- Oscillation optional



PTC812-22A

- 2000W Ceramic heater
- Heat settings: fan/1000/2000W
- With remote controller
- Adjustable thermostat
- Overheat protection
- Oscillation optional



PTC812-30A

- 3000W Ceramic heater
- Heating setting: 1500/3000W
- With remote controller
- Adjustable thermostat
- Overheat protection
- Oscillation optional



PTC810-20E

- 2000W Ceramic heater
- Heat settings: fan/1000/2000W
- With LED display
- With remote controller
- Adjustable thermostat
- Overheat protection
- Oscillation optional



PTC811-20E

- 2000W Ceramic heater
- Heat settings: fan/1000/2000W
- With remote controller
- Adjustable thermostat
- Overheat protection



PTC812-22E

- 2000W Ceramic heater
- Heat settings: fan/1000/2000W
- With diagram display
- Remote controller
- Adjustable thermostat
- Overheat protection



PTC812-30E

- 3000W Ceramic heater
- Heating setting: 1500/3000W
- With LED display
- With remote controller
- Adjustable thermostat
- Overheat protection
- Oscillation optional

Product Model	Power	Product DIMS (WxDxH)	Consumer Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
PTC810-20A	2000W	190x200x520mm	230x220x560mm	4	836	1765	2075	2.15	2.61
PTC810-20E	2000W	190x200x520mm	230x220x555mm	4	851	1796	2111	2.15	2.61
PTC811-20A	2000W	185x165x530mm	230x205x580mm	1	987	2084	2450	2.22	2.8
PTC811-20E	2000W	185x165x530mm	230x205x580mm	1	987	2084	2450	2.22	2.8
PTC812-22A	2200W	225x205x800mm	270x250x580mm	1	476	1005	1182	2.8	4.0
PTC812-22E	2200W	225x205x800mm	270x250x580mm	1	476	1005	1182	2.8	4.0
PTC812-30A	2200W	1000x350x350mm	1040x275x260mm	1	363	767	901	5.0	6.8
PTC812-30E	2200W	1000x350x350mm	1040x275x260mm	1	363	767	901	5.0	6.8



WALL MOUNTED PTC HEATER

HEALTHY AND COMFORTABLE HEATING

Guardian angels of winter



HEAT 3 SECONDS SPEED

High Precision Strong Motor
Wind is more stable



PTC HEATER

2000W
On and off, warm without waiting



SECONDARY WATERPROOF

Dual use of bedroom and bathroom



SILENT DESIGN

New mute technology
Caring for baby sleep



WALL HANGING

Does not occupy a space
multi-usage



SAFETY PROTECTION

Overheating protection
Flame retardant materials

WALL MOUNTED PTC HEATER



PTC851W

- 2000W Ceramic heater
- Heat settings:1000/2000W
- Mechanical control
- Adjustable thermostat
- Overheat protection



PTC851WE

- 2000W Ceramic heater
- Heat settings:1000/2000W
- With LED display and remote controller
- Adjustable thermostat
- Overheat protection



PTC856WE

- 2000W Ceramic heater
- Heat settings:1000/2000W
- With LED display and remote controller
- Adjustable thermostat
- Overheat protection
- Colour : champagne golden

Product Model	Power	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
PTC-851W	2000W	560x120x190mm	620x470x480mm	6	1158	2445	2874	2.0	2.4
PTC-851WE	2000W	560x120x190mm	620x470x480mm	6	1158	2445	2874	2.0	2.4
PTC-856WE	2000W	555x185x125mm	625x560x260mm	6	1780	3758	4418	2.3	2.9

QUARTZ HEATER

MULTIPLE TUBES OF HEAT

Heating healthy, taking care of your family.



QUARTZ HEATER




HIGH TEMPERATURE RESISTANT

High temperature protective net
Reinforcement design



QUARTZ TUBE HEATS QUICKLY

Quick heating and long service life
Soft light, large heat dissipation area
Quiet heating, no radiation health

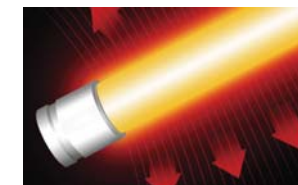

INSTANT HEAT

Quartz tube heats rapidly
Longer heating life



SAFETY PROTECTION

Toppling protection
High temperature protective net
Flame retardant shell



QSY08

- Streamline design, refinement
- Repeating rolling function
- Automatic tip-over protect
- Power: 400W/800W/1200W



QSY18

- Power: 2200W
- 4 Quartz tube
- With adjustable thermostat
- Safety tip-over switch
- IPX4 water-proof degree



QSY09

- Power: 2200W
- 4 Quartz tube
- With adjustable thermostat
- Safety tip-over switch
- IPX4 water-proof degree



QSY10

- Power: 1200W
- 2 Quartz tube
- With rocker switch
- Safety tip-over protect

Product Model	Power	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
QSY08	1200W	330x230x570mm	660x350x625mm	4	748	1579	1856	2.0	2.68
QSY18	2200W	630x125x580mm	660x185x600mm	1	369	778	915	7.5	8.5
QSY09	1200W	300x168x370mm	650x470x505mm	4	700	1478	1737	1.4	2.0
QSY10	1200W	300x160x370mm	655x575x425mm	6	1012	2137	2582	1.06	1.5



QUARTZ HEATER

Seven-leaf fan design

More comfortable
More quiet



HEAT 3 SECONDS SPEED

High Precision Strong Motor
Heat faster



COMPREHENSIVE HEATING

Wide heating area for many people to warm



QUARTZ HEATER



HLS06

- Power: 800W
- Halogen heating element
- High efficiency
- With timer
- Practical carry handle



HLS07

- Power: 600W
- Halogen heating element
- High efficiency
- With timer
- Practical carry handle



HLS15

- Power: 600W
- Halogen heating element
- High efficiency
- Practical carry handle



HLS17

- Power: 1000W
- Halogen heating element
- High efficiency
- With timer



HLS18

- Power: 1000W
- Halogen heating element
- High efficiency
- With timer



CTXW11

- Power: 300W
- Carbon fiber heating element
- High efficiency
- With timer
- Practical carry handle

Product Model	Power	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Loading Qty			N.W.(kgs)	G.W.(kgs)
					20FCL	40FCL	40HQ		
HLS06	800W	350x260x425mm	355x60x490mm	1	597	1260	1481	1.5	2.3
HLS07	800W	365x270x480mm	355x60x490mm	1	554	1170	1376	1.3	2.2
HLS15	600W	320x225x430mm	765x510x450mm	6	923	1948	2290	1.1	1.9
HLS17	1000W	410x400x920mm	430x330x400mm	1	476	1004	1180	3.5	4.5
HLS18	1000W	400x330x950mm	430x330x400mm	1	476	1004	1180	3.5	4.5
CTXW11	300W	200x200x605mm	510x390x580mm	4	936	1976	2323	2.0	2.5

INDUSTRIAL FAN HEATER


HIGH POWER, HIGH AIR VOLUME

High-end industrial heater series



HIGH POWER POWER CORD

High power bearing
More comfortable use

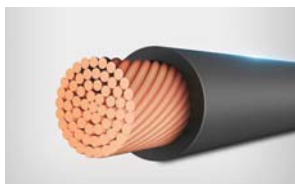

HIGH-POWER

Power is warmer.



STEEL TANK

Soft and durable



WATERPROOF IPX4

Waterproof advanced
outdoor use is also assured



BIG AIR VOLUME

Very large air duct, very large heat



SAFETY PROTECTION

When the temperature is too high,
the power will be cut off automatically



INDUSTRIAL FAN HEATER



Features:

Heating element : Stainless steel
Adjustable thermostat control
Overheat protection With time-delay function
Full metal casing
Insulated handle more safe for using
Free standing & portable type
Waterproof class IP24
With capillary-thermostat which could control the temperature of enviroment



Features:

Heating element : Stainless steel
Adjustable thermostat control
Overheat protection
With Fan
Full metal casing
Insulated handle more safe for using
Free standing & portable type
Waterproof class IP24

Product Model	Electrial Supply	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Heating Output	Air Output	Quantity			N.W.(kgs)	G.W.(kgs)
							20 GP	40 GP	40 HP		
YXE-30R	220-240V~50Hz	700x420x400mm	795x370x440mm	1	30/1500/3000W	360m³	595	1190	1500	6.2	7.2
YXE-50R	380-400V 3~50Hz	755x420x540mm	795x370x440mm	1	30/2500/5000W	380m³	595	1190	1500	6.8	7.8
YXE-90R	380-400V 3~50Hz	920x456x630mm	905x420x490mm	1	52/4500/9000W	980m³	420	840	980	11.9	13.0
YXE-150R	380-400V 3~50Hz	1050x490x615mm	1045x465x570mm	1	110/5000/10000/15000W	1700m³	240	480	568	22.3	26.5

Product Model	Electrial Supply	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Heating Output	Air Output	Quantity			N.W.(kgs)	G.W.(kgs)
							20 GP	40 GP	40 HP		
YXE-02	220-240V~50Hz	255x215x340mm	265x235x350mm	1	25/2000W	156m³	1300	2600	3100	3.5	4.0
YXE-03	220-240V~50Hz	255x215x340mm	265x235x350mm	1	30/3000W	305m³	1300	2600	3100	3.8	4.2
YXE-02R	220-240V~50Hz	255x215x340mm	265x235x350mm	1	25/2000W	156m³	1300	2600	3100	3.6	4.1
YXE-03R	220-240V~50Hz	255x215x340mm	265x235x350mm	1	30/3000W	305m³	1300	2600	3100	3.8	4.2



Features:

Heating element : Stainless steel
Adjustable thermostat control
Overheat protection
With Cooling
Strong and long lasting construction
Free standing & portable type
9kW/15kW with time-delay function
5kW/9kW with relay
Waterproof class IP24
Suitable for warehouse,garages,workshops,buliding sites,etc



Features:

Heating element : Stainless steel
Adjustable thermostat control
Overheat protection
With Cooling
Strong and long lasting construction
Free standing & portable type
9kW/15kW/22kW with time-delay function
5kW/9kW/22kW with relay
Waterproof class IP24
Suitable for warehouse,garages,workshops,buliding sites,etc

Product Model	Electrial Supply	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Heating Output	Air Output	Quantity			N.W.(kgs)	G.W.(kgs)
							20 GP	40 GP	40 HP		
YXF-20C	220-240V~50Hz	235x300x370mm	310x255x390mm	1	25/1000/2000W	186m³	990	1980	2262	4.2	5.0
YXF-30C	220-240V~50Hz	295x358x455mm	325x325x475mm	1	30/1500/3000W	540m³	588	1176	1357	5.9	7.0
YXF-33C	220-240V~50Hz	295x358x455mm	325x325x475mm	1	30/1500/3300W	540m³	588	1176	1357	5.9	7.0
YXF-50C	380-400V 3~50Hz	295x358x455mm	325x325x475mm	1	30/2500/5000W	530m³	588	1176	1357	6.3	7.2
YXF-90C	380-400V 3~50Hz	420x395x540mm	430x375x555mm	1	52/4500/9000W	1086m³	312	624	752	11.8	13.0
YXF-150C	380-400V 3~50Hz	450x450x600mm	470x470x628mm	1	90/5000/10000/15000W	1292m³	222	444	499	14.5	15.6

Product Model	Electrial Supply	Product DIMS (WxDxH)	CTN Box DIMS (WxDxH)	PCS/CTN	Heating Output	Air Output	Quantity			N.W.(kgs)	G.W.(kgs)
							20 GP	40 GP	40 HP		
YXF-30B	220-240V~50Hz	252x290x430mm	305x280x460mm	1	30/1500/3000W	476m³	760	1520	1760	5.8	6.3
YXF-33B	220-240V~50Hz	252x290x430mm	305x280x460mm	1	30/1650/3300W	476m³	760	1520	1760	5.8	6.3
YXF-50B	380-400V 3~50Hz	252x290x430mm	305x280x460mm	1	30/2500/5000W	468m³	760	1520	1760	6.5	7.2
YXD-90B	380-400V 3~50Hz	355x300x490mm	365x315x510mm	1	52/4500/9000W	708m³	490	980	1120	9.6	10.6
YXD-150B	380-400V 3~50Hz	410x360x550mm	420x365x560mm	1	90/5000/10000/15000W	1292m³	336	672	784	14.5	15.6
YXD-220B	380-400V 3~50Hz	450x410x600mm	445x445x628mm	1	110/11000/22000W	1784m³	230	470	550	21.8	23.2
YXF-20A	220-240V~50Hz	205x215x280mm	250x240x348mm	1	25/1000/2000W	272m³	1140	2280	3250	3.1	3.8
YXF-30A	220-240V~50Hz	260x250x340mm	295x295x435mm	1	30/1500/3000W	340m³	720	120	1750	3.5	4.1
YXF-33A	220-240V~50Hz	260x250x340mm	295x295x435mm	1	30/1650/3300W	550m³	720	1520	1750	4.0	4.6
YXD-50A	380-400V 3~50Hz	265x255x345mm	295x295x435mm	1	30/2500/5000W	550m³	720	1520	1750	5.1	5.9
YXD-90A	380-400V 3~50Hz	305x285x390mm	330x330x510mm	1	52/4500/9000W	787m³	532	1064	1260	7.0	8.0